YJT 系列二级压缩无油螺杆空压机

YJT SERIES TWO-STAGE OIL-FREE SCREW AIR COMPRESSOR


YJT 二级压缩无油螺杆空压机，同等工况下相比单级、干式无油机节能 25% 以上。两级压缩趋近等温压缩，分级降低压缩比，提升主机容积效率，运行温度＜50℃，无高温灼伤风险。广泛应用于食品饮料、制药医疗、电子半导体、精密制造、化工等高洁净度场景。

YJT Two-Stage Oil-Free Screw Air Compressor achieves over 25% energy savings under identical working conditions compared with single-stage and dry-type oil-free compressors. Approaching isothermal compression with staged reduction of pressure ratio, it improves main unit volumetric efficiency and operates below 50℃ with no risk of high-temperature burns.

Widely applied in high cleanliness scenarios such as food & beverage, pharmaceutical & medical, electronics & semiconductors, precision manufacturing and chemical industries.

有效节能 25% 以上
Over 25% Effective Energy Savings

YJT Series

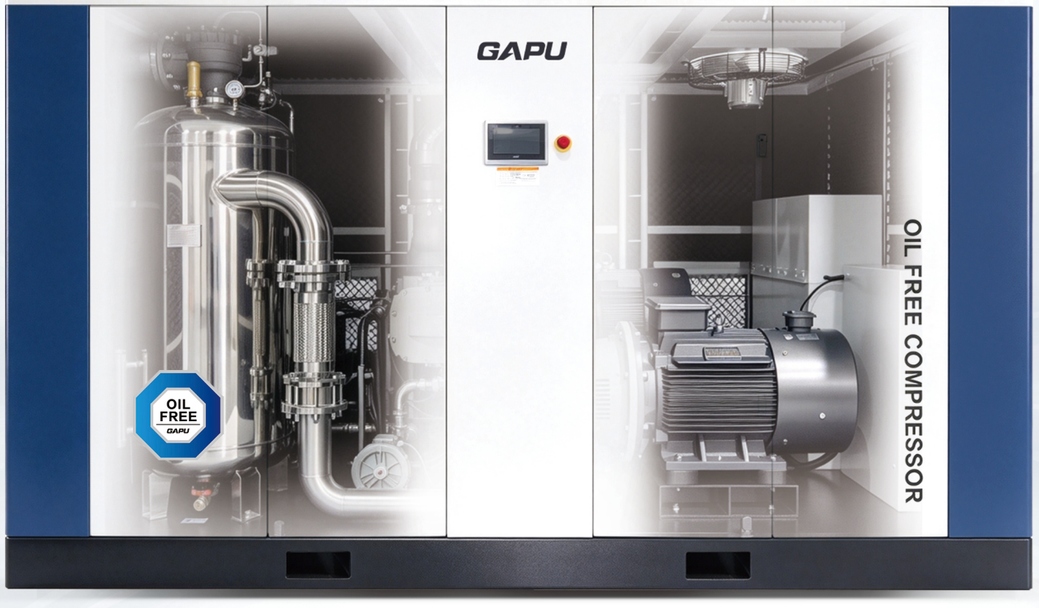

二级等温压缩
Two-stage Isothermal Compression

运行温度＜50℃
Operating Temp ＜50℃

高洁净气源
High Purity Air Source

型号	功率	压力	排气量	外形尺寸 L×W×H	重量	噪音	出口管径
	KW	Mpa	m^3/min	mm	kg	(dB)A	inch
YJT90A/W	55+37	0.8	20	3400*2000*2100(A) 3000*1600*2100(W)	3500	75	3〃
YJT120A/W	75+45	1.0	20	3400*2000*2100(A) 3000*1600*2100(W)	3550	75	3〃
YJT120A/W	75+45	0.8	24	3400*2000*2100(A) 3000*1600*2100(W)	3600	78	3〃
YJT140A/W	75+65	1.0	24	4000*2100*2400(A) 3000*1600*2100(W)	3800	78	3〃
YJT165W	90+75	0.8	30	3000*1600*2100	3500	78	3〃
YJT180W	90+90	1.0	30	3000*1600*2100	3500	80	3〃
YJT185W	110+75	0.8	36	3600*2000*2100	4500	80	5〃
YJT200W	110+90	1.0	36	3600*2000*2100	4500	80	5〃
YJT200W	110+90	0.8	40	3600*2000*2100	4500	80	5〃
YJT220W	132+90	1.0	40	3600*2000*2100	4500	80	5〃
YJT240W	132+110	0.8	45	3800*2000*2100	4700	80	5〃
YJT270W	160+110	1.0	45	3800*2000*2100	4700	80	5〃
YJT270W	160+110	0.8	50	3800*2000*2100	4700	80	5〃
YJT290W	160+132	1.0	50	3800*2000*2100	5000	80	5〃
YJT310W	200+110	0.8	60	3800*2000*2100	5500	80	5〃
YJT330W	200+132	1.0	60	3800*2000*2100	5800	80	5〃

V: 表示常压 L: 表示低压 H: 表示中压 T: 表示两级压缩 A: 表示风冷型 W: 表示水冷型

注 : 可接受不同压力规格的定制

本公司产品不断改进，保留产品参数更新的权利，恕不另行通知。

V: Normal Pressure L: Low Pressure H: Medium Pressure T: Two-Stage Compression A: Air-Cooled Type W: Water-Cooled Type
Note: Customization of different pressure specifications is available.
Our products are subject to continuous improvement. We reserve the right to update product parameters without prior notice.